


Progressive distributors

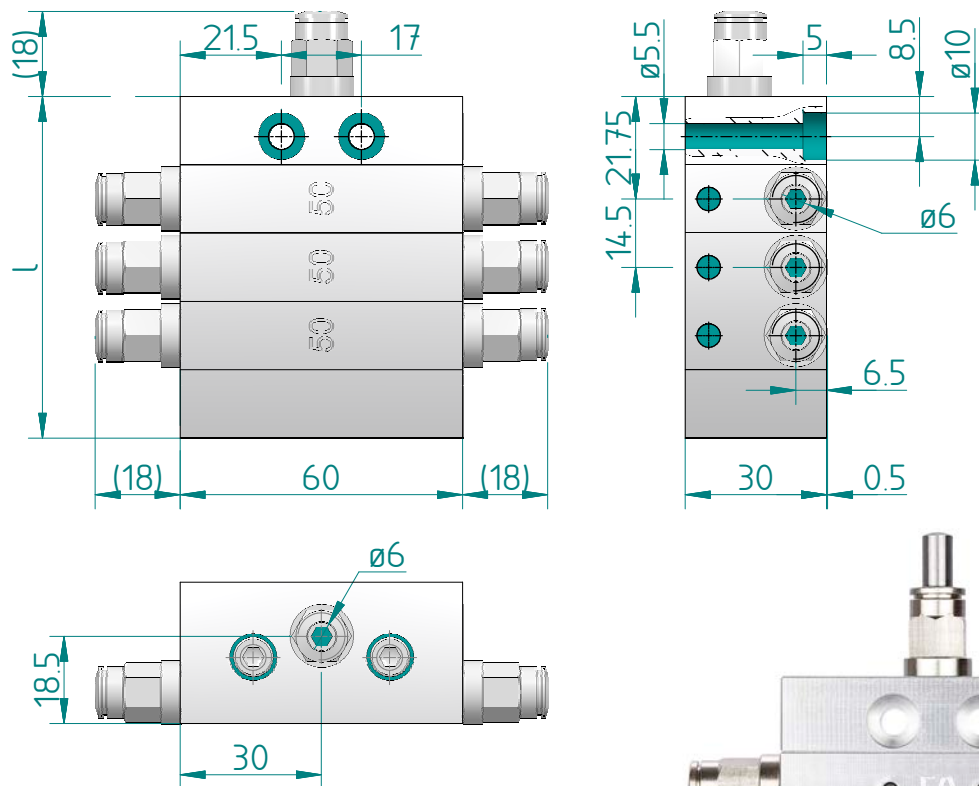

Description:

DLS Progressive distributors offer a light weight solution using variable disc construction and are available for use with the complete range of FlexxPUMPS Lubricant quantities based on DLS Grease lubricants.

Material:

Distributor: aluminum;
Connections: brass, nickel-plated



6-way disc distributor with 3 dosing discs including 6mm, straight tube connectors at inlet and outlets.

outlets	inlet	tube	outlets	tube	l	part-no.
2	straight	6	straight	6	72.5	238-000-002
3	straight	6	straight	6	72.5	238-000-003
4	straight	6	straight	6	72.5	238-000-004
5	straight	6	straight	6	72.5	238-000-005
6	straight	6	straight	6	72.5	238-000-006
7	straight	6	straight	6	87.0	238-000-007
8	straight	6	straight	6	87.0	238-000-008
9	straight	6	straight	6	101.5	238-000-009
10	straight	6	straight	6	101.5	238-000-010

Standard design:

- Modular disk constructed distributors in lightweight aluminum for use with FlexxPump 125/400/1500 & DLS greases
- 2 to 10 outlets per distributor possible
- Tube connection to inlet and outlets straight for tube 6 mm OD
- Maximum pressure 100 bar (1450 PSI)
- Dosing volume 50 mm³


Special design (on request):

- Tube connection in various designs, straight / angled
- Different tube diameters, 4/6/8 mm at inlet or outlet
- Determination of the locations of the outlets
- Different delivery quantities per outlet through disk elements with different dosing volume (25/50/100 mm³)

Good to know:

- Only suitable DLS lubricant can be used!
- Operating temperature range: -20 °C ... + 60 °C (depending on the lubricant used)
- Cannot be used in series in conjunction with FlexxPump 125/400/1500 (no main and secondary distributors / cascading)
- Vented with oil with H1 approval

Progressive Distributors with circulation monitoring

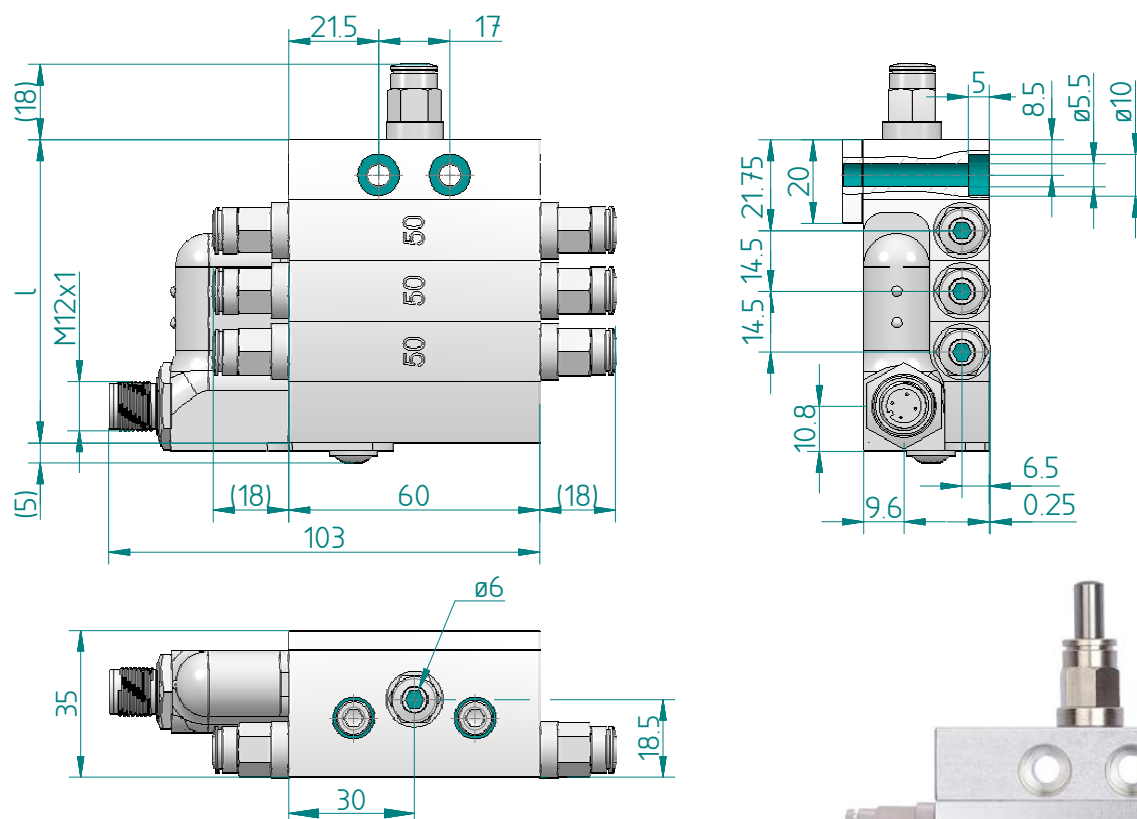

Description:

DLS Progressive distributors offer a light weight solution using variable disc construction and are available for use with the complete range of FlexxPUMPS
Output quantities based on DLS grease lubricants.

Material:

Distributor: aluminum
Connections: brass, nickel-plated



6-way disc distributor with 3 dosing discs including 6mm, straight tube connectors at inlet and outlets.

outlets	inlet	tube	outlets	tube	l	part-no.
2	straight	6	straight	6	72.5	238-010-002
3	straight	6	straight	6	72.5	238-010-003
4	straight	6	straight	6	72.5	238-010-004
5	straight	6	straight	6	72.5	238-010-005
6	straight	6	straight	6	72.5	238-010-006
7	straight	6	straight	6	87.0	238-010-007
8	straight	6	straight	6	87.0	238-010-008
9	straight	6	straight	6	101.5	238-010-009
10	straight	6	straight	6	101.5	238-010-010

Standard design:

- Modular disk constructed distributors in lightweight aluminum for use with FlexxPump 125/400/1500 & DLS greases
- With circulation monitoring to control the correct operation of all outlets
- 2 to 10 outlets per distributor possible
- Tube connection to inlet and outlets straight for tube 6 mm OD
- Maximum pressure 100 bar (1450 PSI)
- Dosing volume 50 mm³

Special design (on request):

- Tube connection in various designs, straight / angled
- Different tube diameters, 4/6/8 mm at inlet or outlet
- Determination of the locations of the outlets
- Different delivery quantities per outlet through disk elements with different dosing volume (25/50/100 mm³)

Good to know:

- Only suitable DLS lubricant can be used!
- Operating temperature range: -20 °C ... + 60 °C (depending on the lubricant used)
- Cannot be used in series in conjunction with FlexxPump 125/400/1500 (no main and secondary distributors / cascading)
- Vented with oil with H1 approval